Dunne ECO



Passive windows as standard

BLUEVOLUTION 82

WINDOW AND DOOR SYSTEM.



0,77	3	6	82	R	A
Uw for Ug = 0.5 (Ultimate spacer bar)	gaskets	chambers (frame)	construction depth (mm)	renovation	aluminium cover

- standard hardware with 6 anti-theft points
- standard blockade of incorrect handle position (RU windows)
- glazing with packages up to 53 mm wide

Dunne ECO



Passive windows as standard

IN-LINE PVC WINDOW

Energeto Neo



- installation depth 76 mm
- glazing with packages from 36 to 68 mm
- frame and sash height 115 mm
- bonding inside technology gluing glass
- composite reinforcement (replaces the steel core)
- woodec and aludec structures available

0.76	3	6
Uw for Ug = 0.5 (the Ultimate frame)*	Gaskets	Chambers

Dunne Ecofit Limited **Tullamore Co Offaly** L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com


Dunne ECO



Passive windows as standard
ALUCLAD PVC WINDOW

BLUEVOLUTION 82

WINDOW AND DOOR SYSTEM.

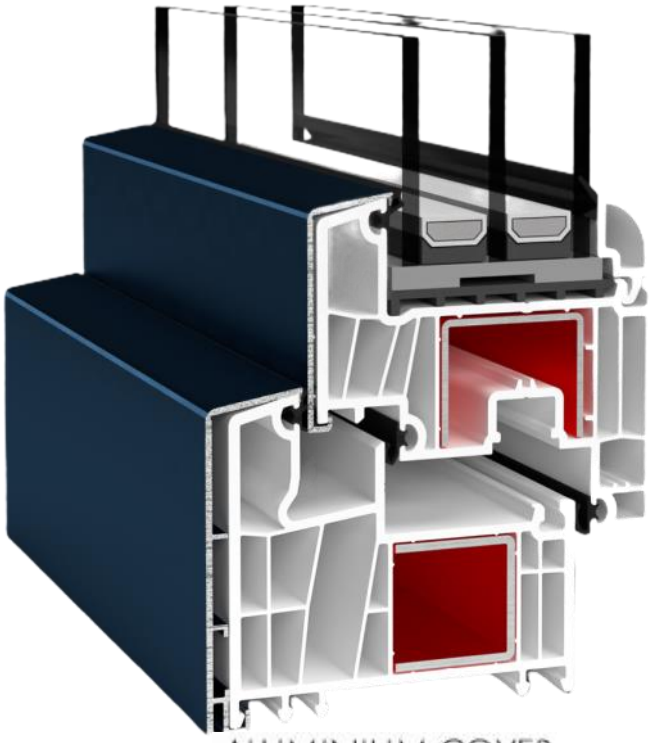

ALUMINIUM COVER

0,77	3	6	82	R	A
Uw for Ug = 0.5 (Ultimate spacer bar)	gaskets	chambers (frame)	construction depth (mm)	renovation	aluminium cover

standard hardware with 6 anti-theft points

standard blockade of incorrect handle position (RU windows)

glazing with packages up to 53 mm wide

Dunne Ecofit Limited Tullamore Co Offaly L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com


Dunne ECO



Passive windows as standard
ALUCLAD PVC WINDOW

BLUEVOLUTION 82

WINDOW AND DOOR SYSTEM.

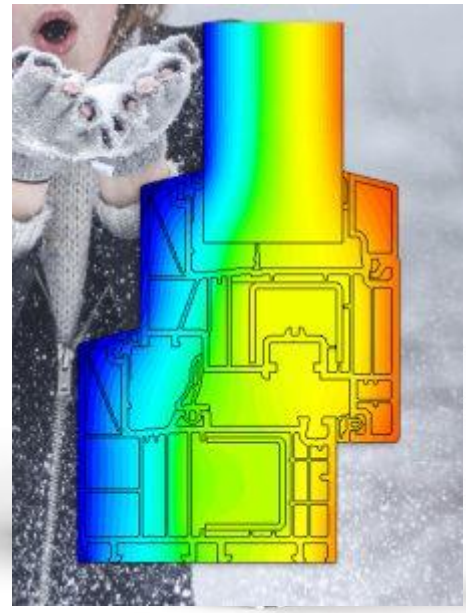

0,77	3	6	82	R	A
Uw for Ug = 0.5 (Ultimate spacer bar)	gaskets	chambers (frame)	construction depth (mm)	renovation	aluminium cover

standard hardware with 6 anti-theft points

standard blockade of incorrect handle position (RU windows)

glazing with packages up to 53 mm wide

Dunne Ecofit Limited Tullamore Co Offaly L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com

Dunne ECO





Fittings

Roto multi-point locking fittings, wide adjustment range, unquestioned reliability

Glazing

sTriple-glazed unit 4/18/4/18/4, Ug = 0,5 W/m2K, argon-filled chambers, Low-E glass

Profile

5-chamber Kömmerling profile, German made, frame width 76 mm.

Steel reinforcement

Sections of galvanized steel guaranteeing high static parameters of window construction.



Dunne Ecofit Limited Tullamore Co Offaly L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com

Dunne ECO





Dunne ECO







Dunne Ecofit Limited Tullamore Co Offaly L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com

Dunne ECO





Dunne ECO







Dunne Ecofit Limited Tullamore Co Offaly L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com

Dunne ECO









BEFORE

AFTER



Dunne ECO





















Dunne Ecofit Limited **Tullamore Co Offaly** L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com

Dunne ECO



SLIDING DOORS





Dunne Ecofit Limited Tullamore Co Offaly L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com

Dunne ECO



SLIDING DOORS






Dunne Ecofit Limited Tullamore Co Offaly L: 353 (0)57 93 22468 www.dunneeco.com Email info@dunneeco.com

Dunne ECO





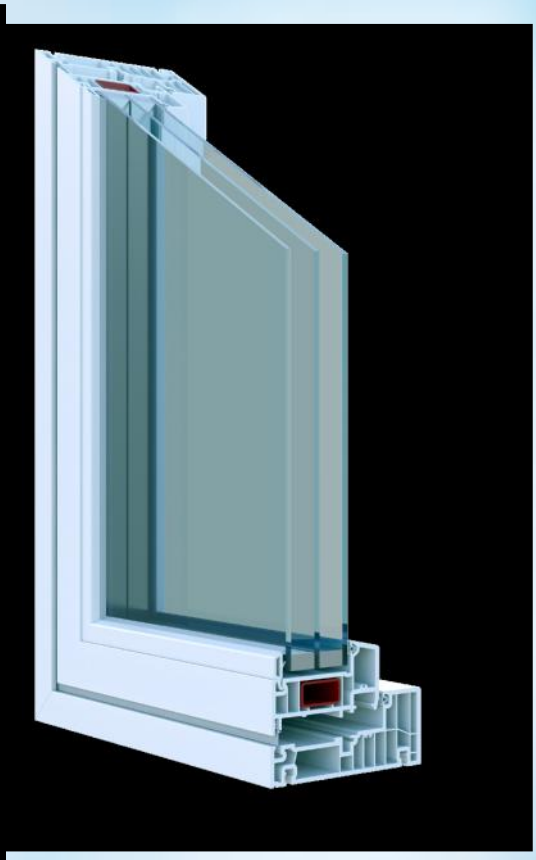

Premidoor 76 Lift and Slide door

U-value of 0,90

HS Door is attractive and practical alternative for traditional balcony doors.

Our doors are constructed with a thought about clients for who care about:

sunlight exposure, flexibility of interior design, sense of the space and unique design

Dunne ECO





About us

We here at Dunne Eco Really feel passionate about the Manufacture of Joinery
We truly believe that you will be very impressed with our costings
Many thanks for taking the time to go through this brochure

Dunne Ecofit Ltd
Tanyard Industrial Estate
Tullamore
Co. Offaly
T 05793 22468
M 0872574270
Email ian@dunneeco.com